

Experience the unparalleled elegance of it and transform your space into a work of art. Explore our exquisite collection or contact us today to discuss your project requirements. Let us be your trusted partner in realizing your design dreams.






600 X 1200 MM



We source our tiles from the finest materials, ensuring durability, resilience, and aesthetic appeal. Each tile undergoes rigorous quality checks to meet international standards.

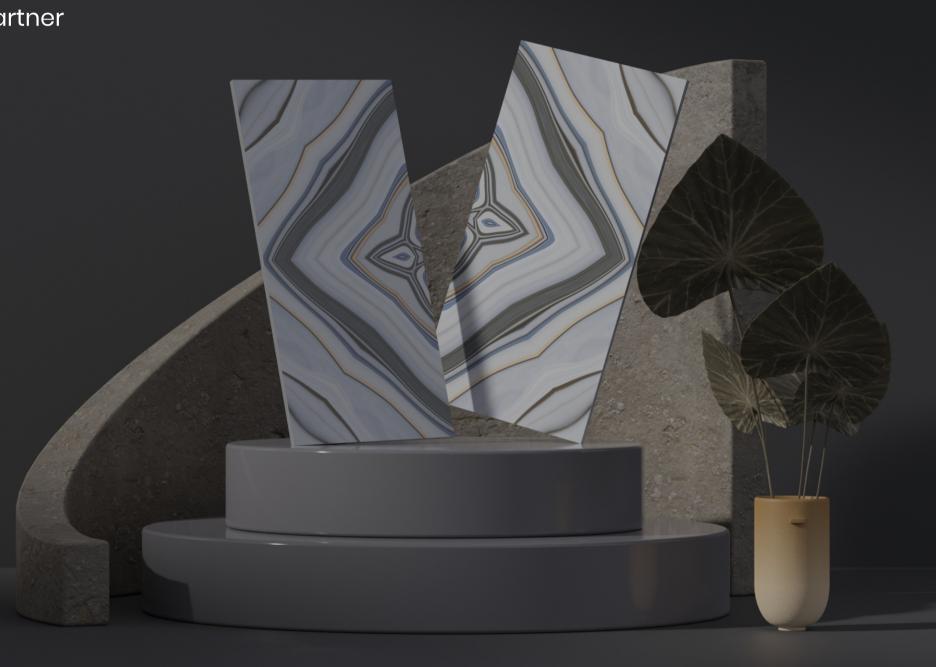





TECHNICAL SPECIFICATION

It is made surfaces which are adorn your space and stable in any condition and also easy to applicable anywhere we can call that It is a timeless beauty.

600 1200 MM









Installation



Easy to Clean





Impact Resistance



Resistance



Frost



Resistance



Crazing Resistance






Thermal Shock Resistance



Absorption

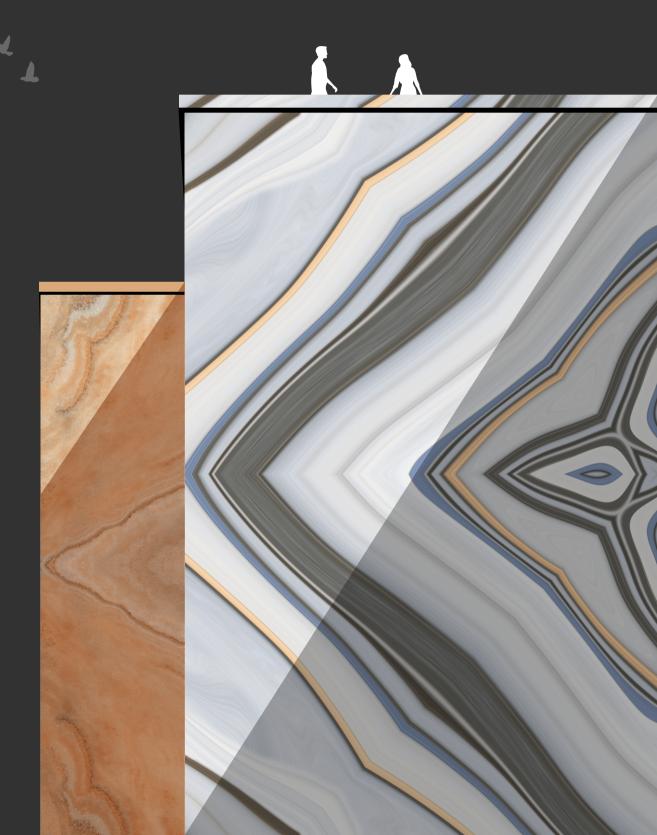





APPLICATION

It is made surfaces which are adorn your space and stable in any condition and also easy to applicable anywhere we can call that it is a timeless beauty.







合 Residential













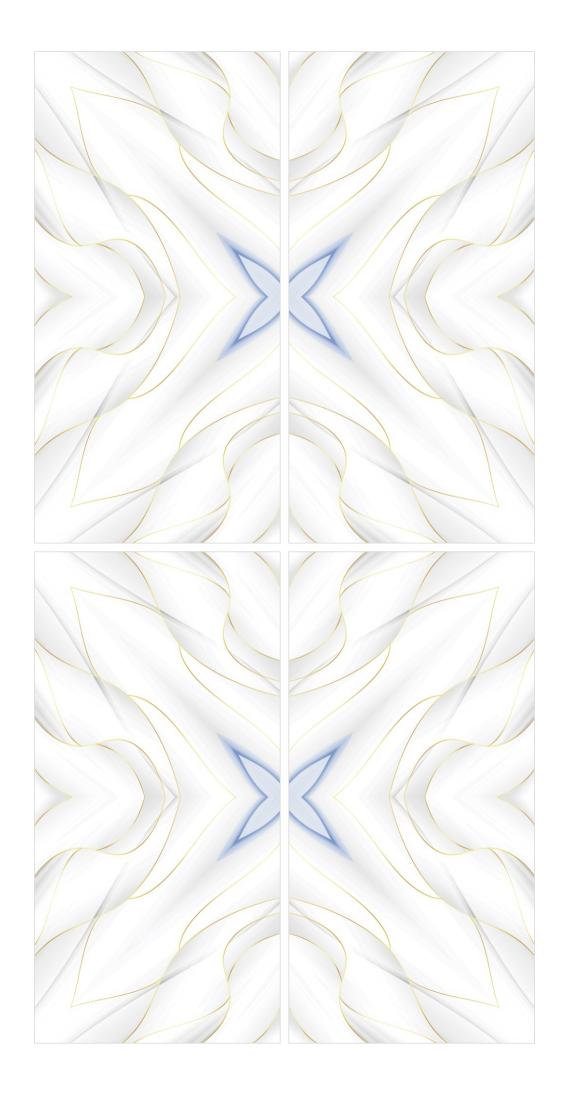

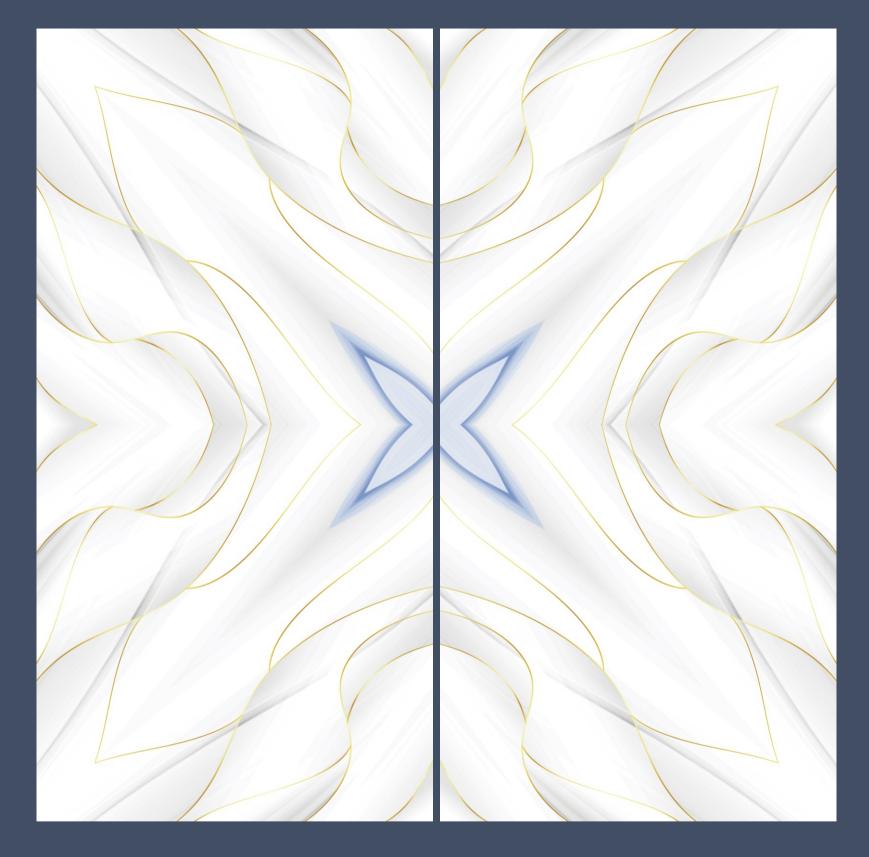













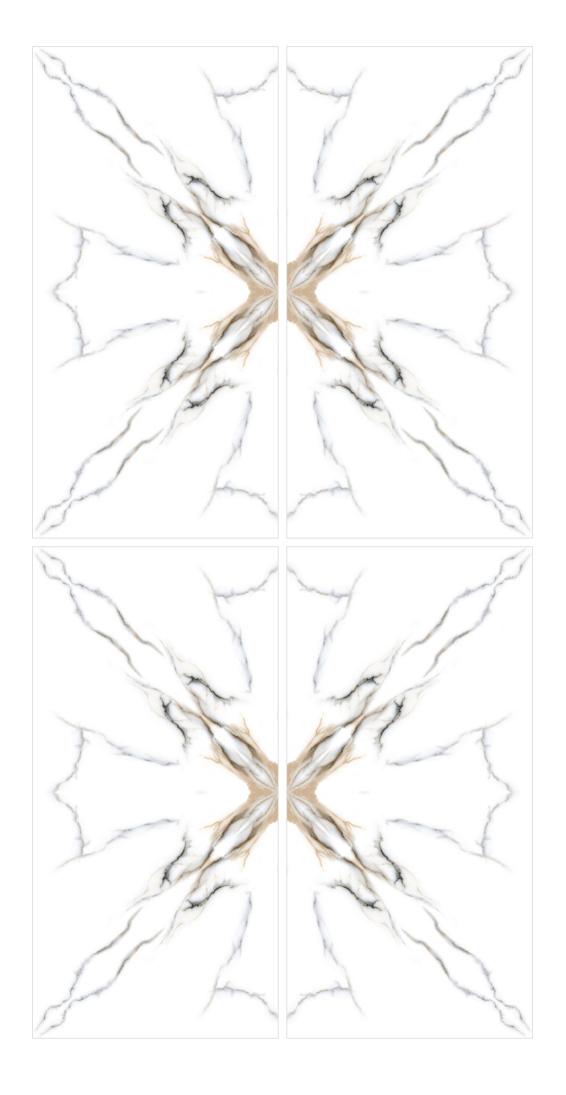

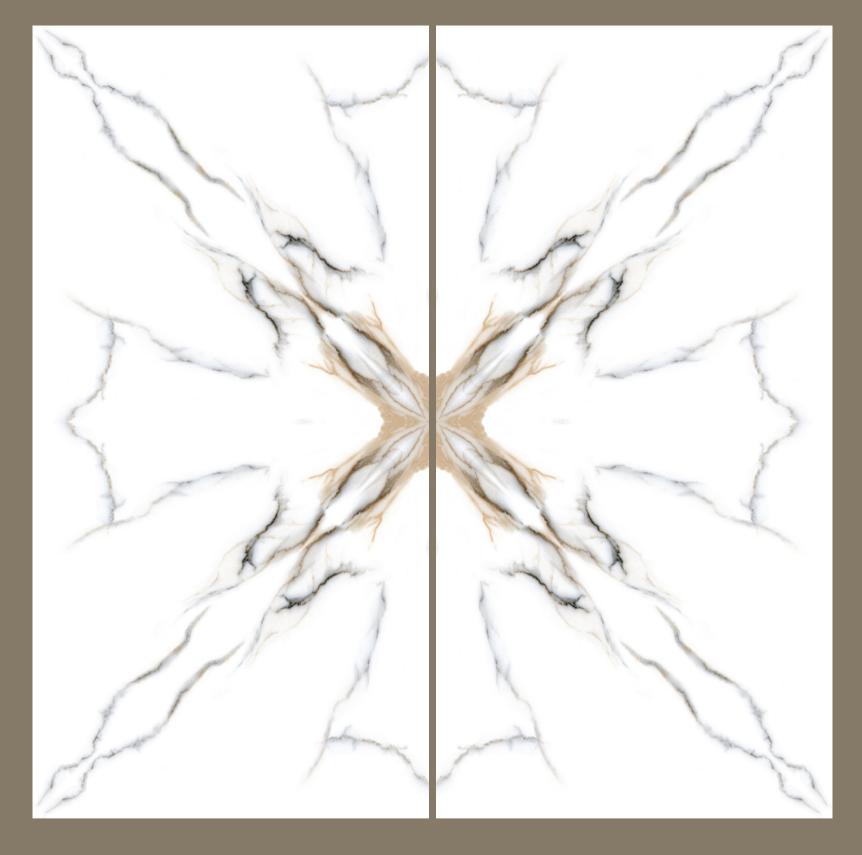













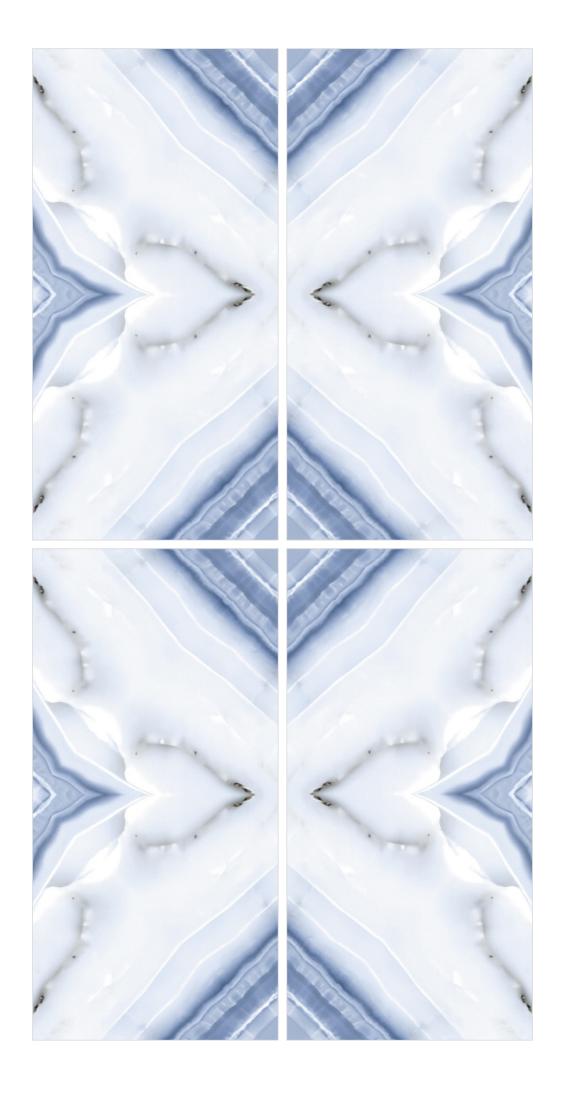

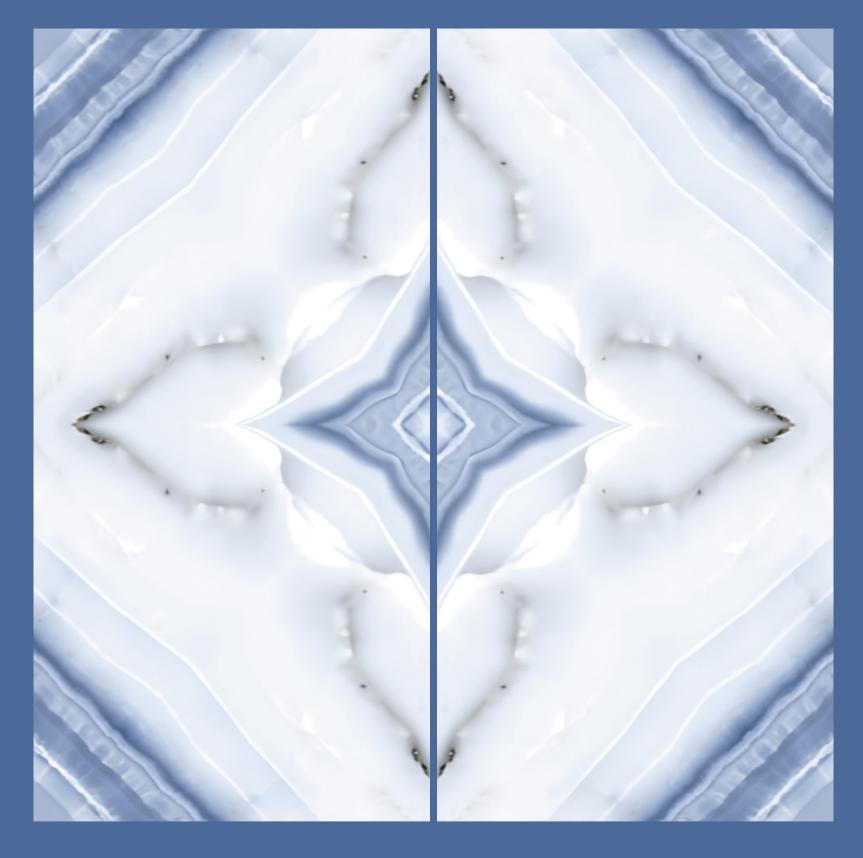












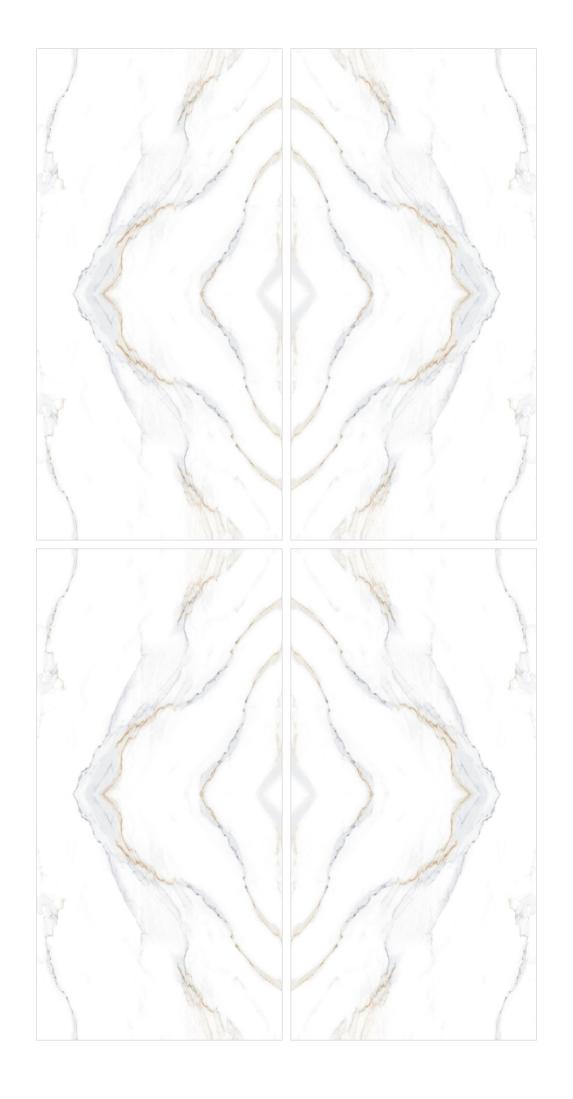














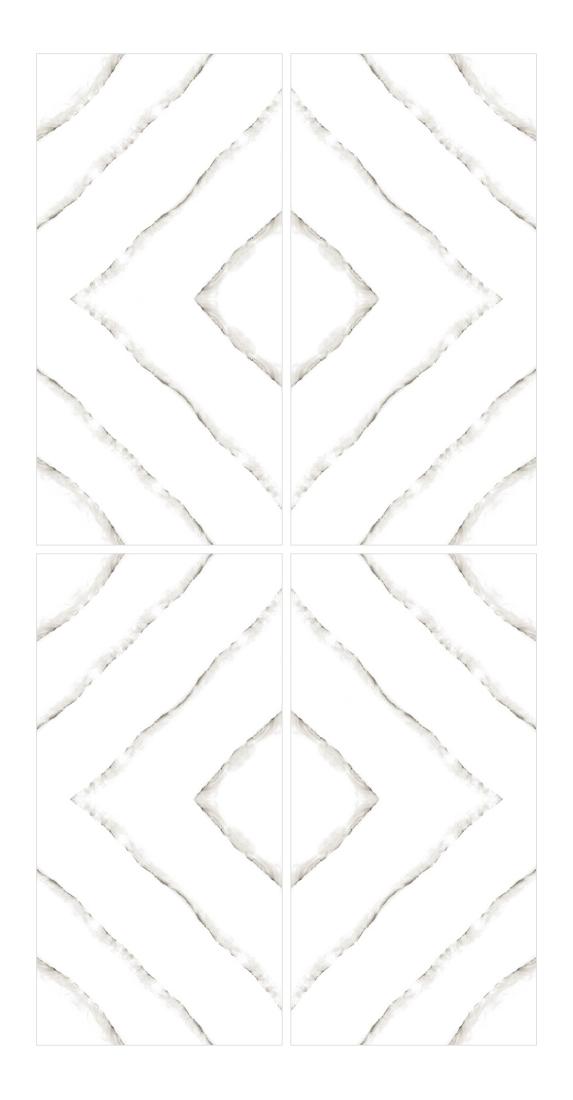















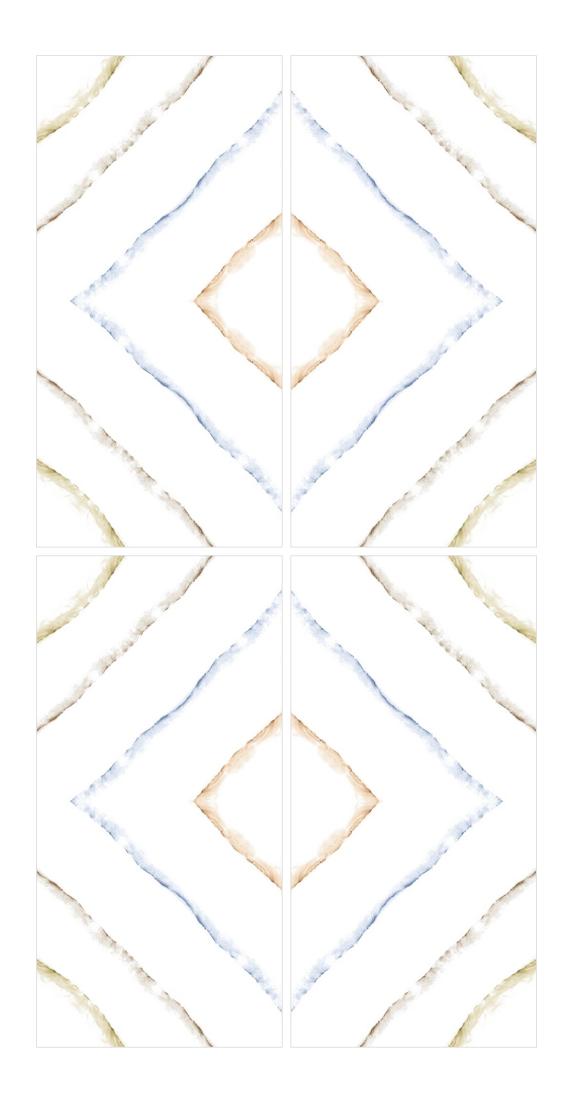

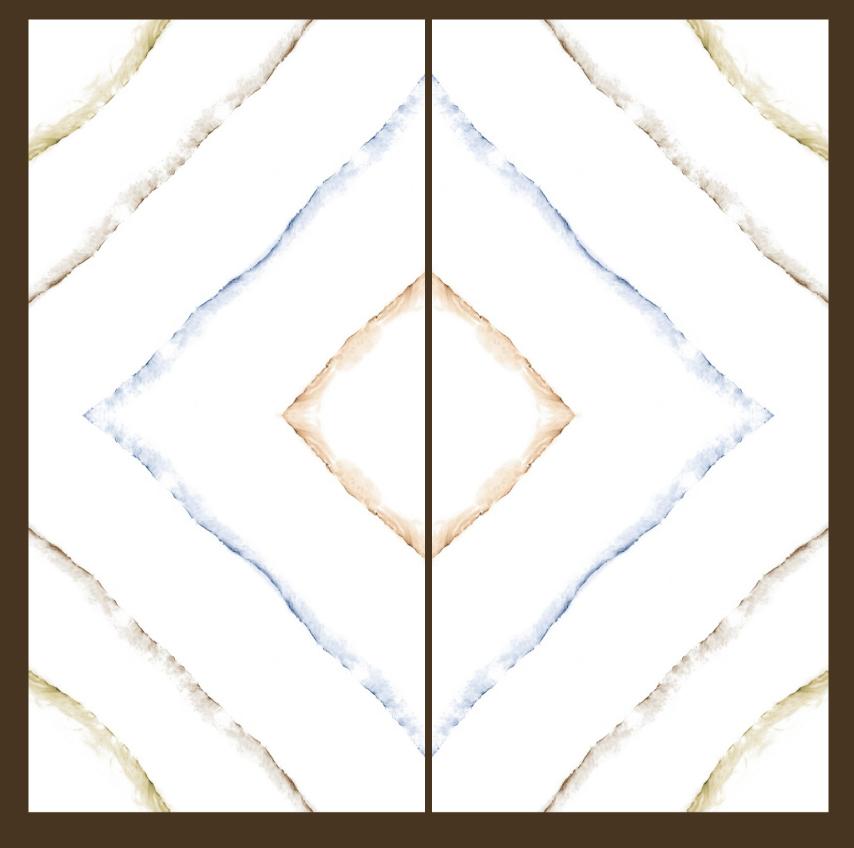










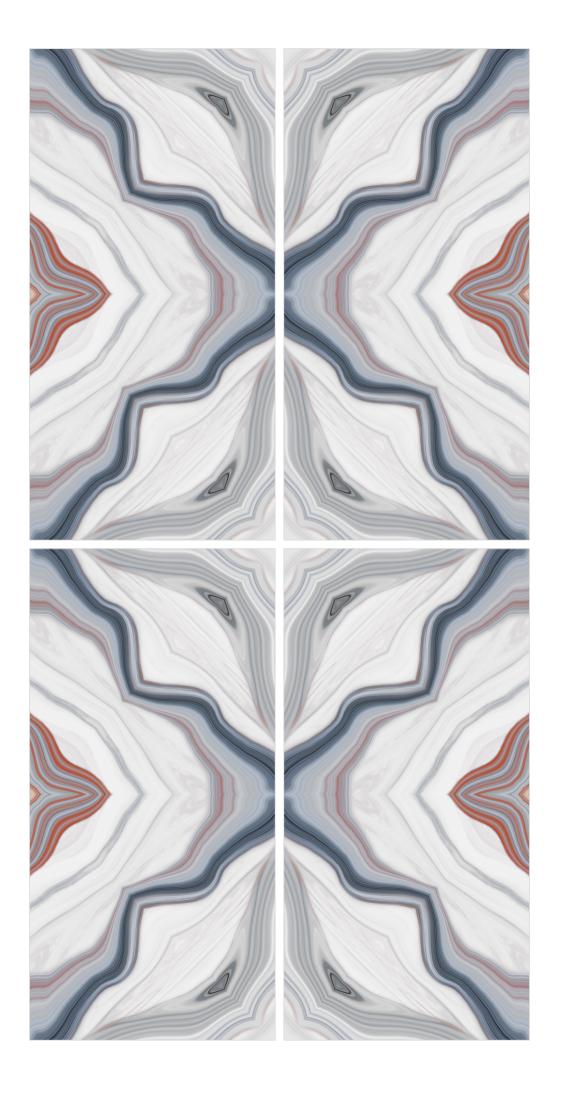












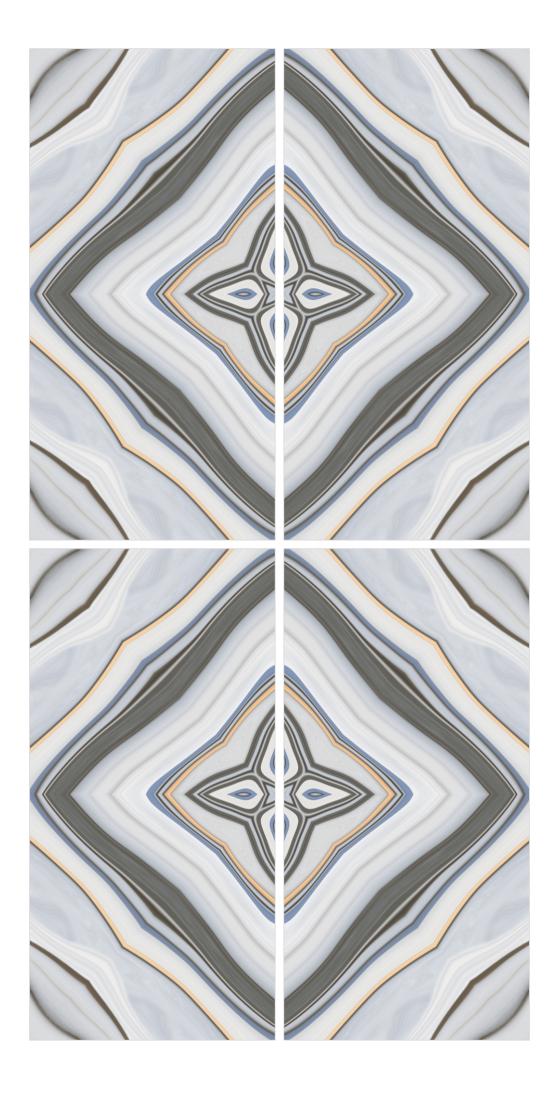














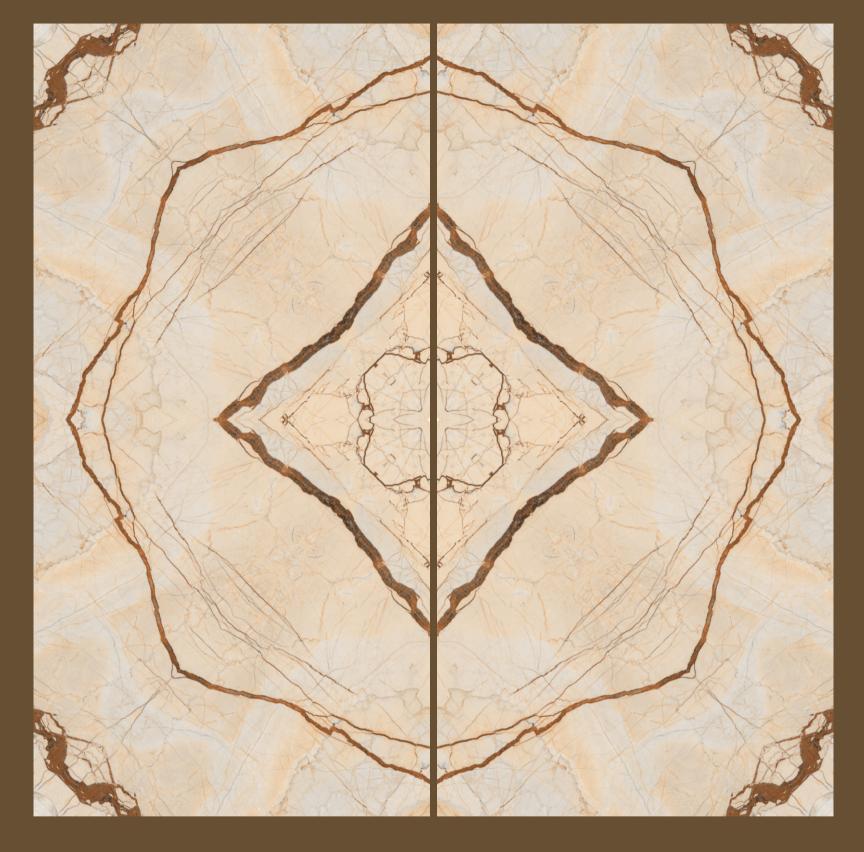












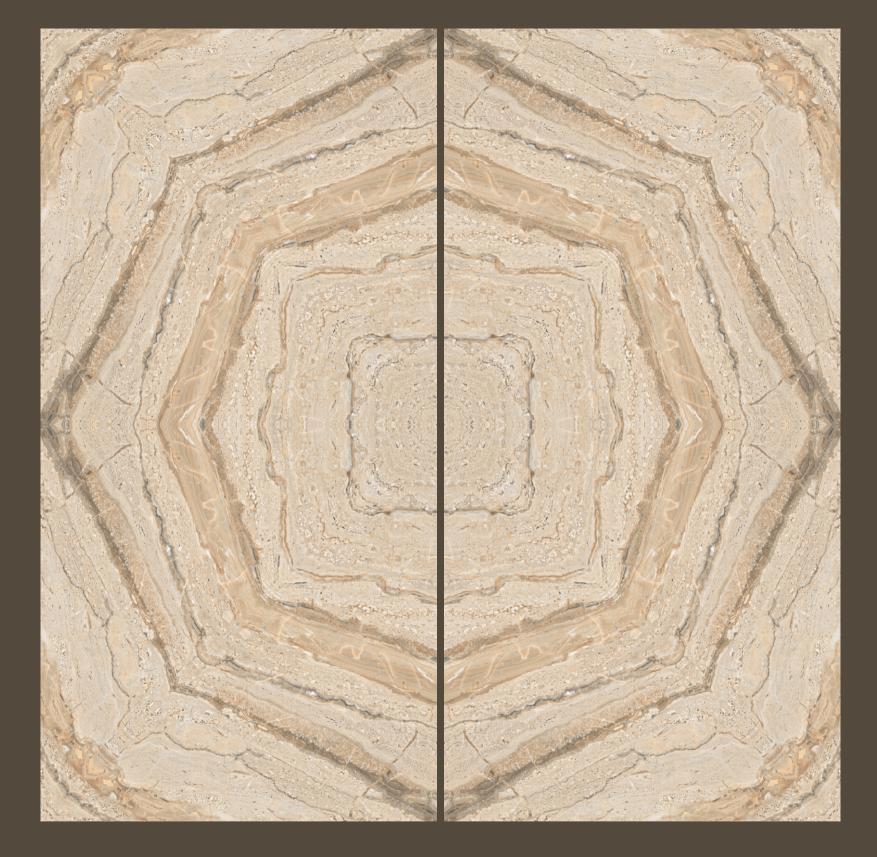




SIZE: FINISH: GLOSSY









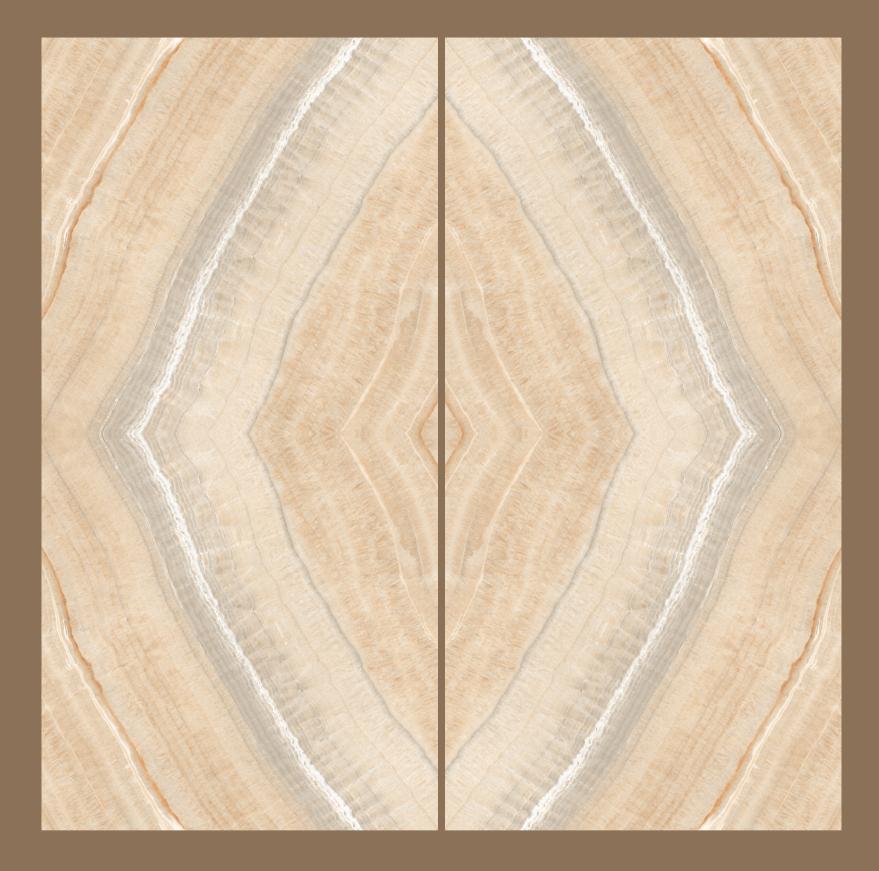




SIZE: FINISH: / RANDOM 600X1200MM / GLOSSY









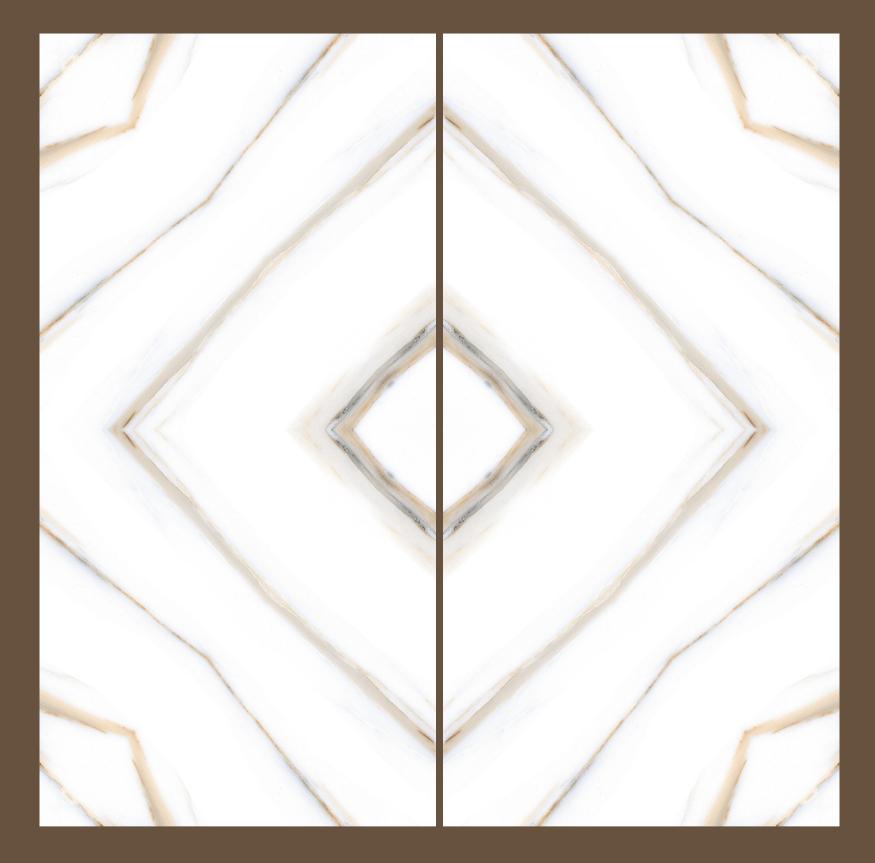














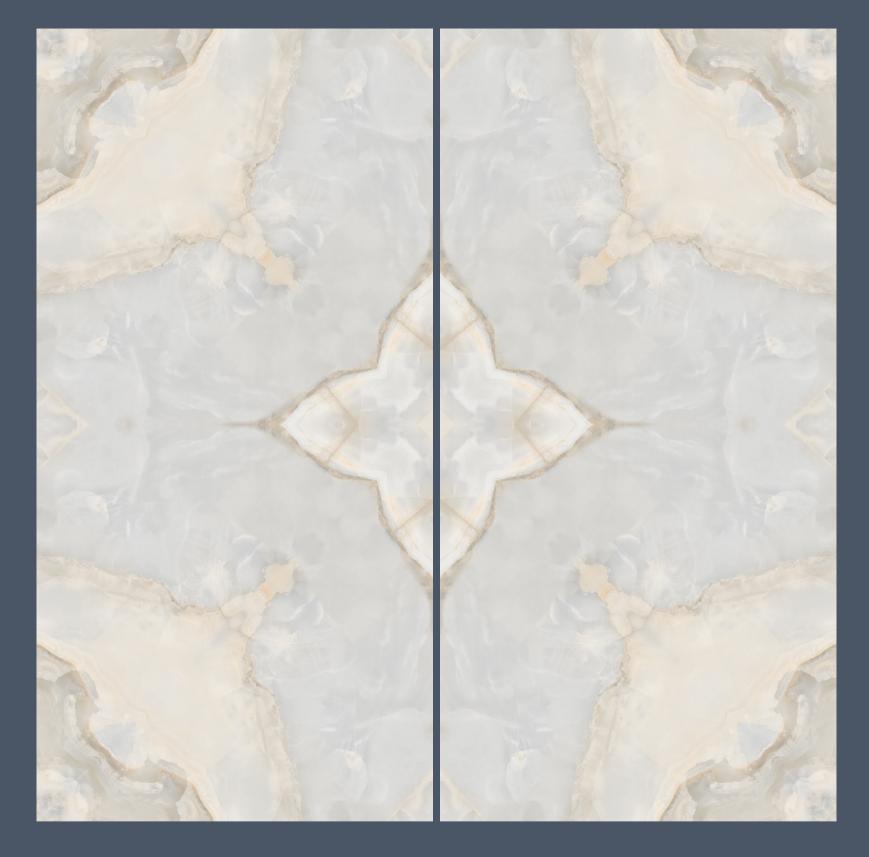



SIZE: FINISH: GLOSSY













SIZE: FINISH: GLOSSY













SIZE: FINISH: RANDOM GLOSSY






















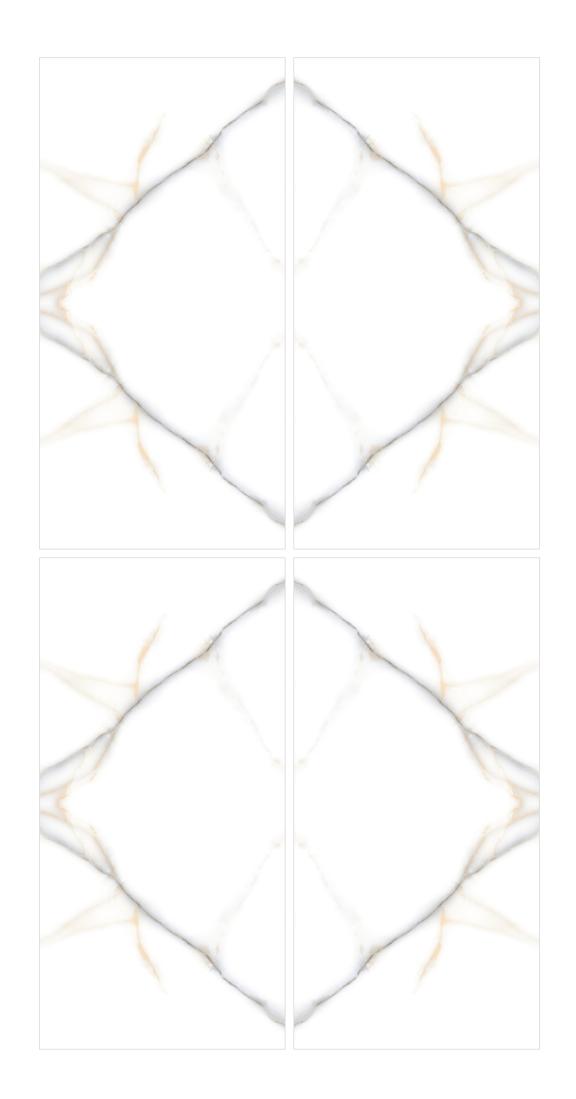

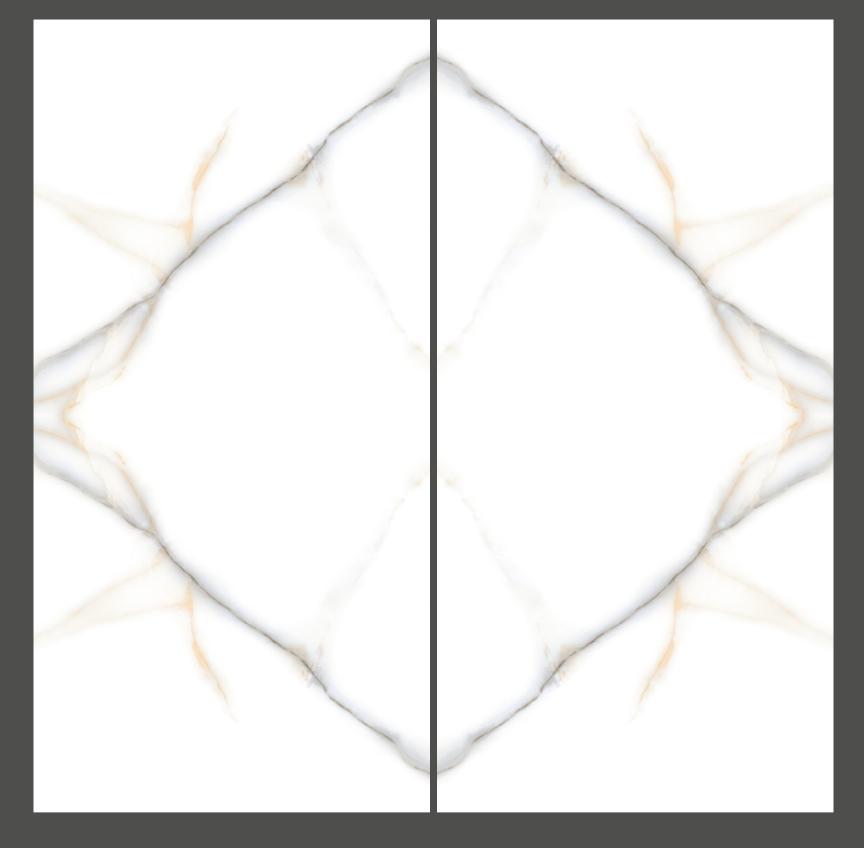



SIZE: FINISH: RANDOM GLOSSY














SIZE: FINISH: GLOSSY







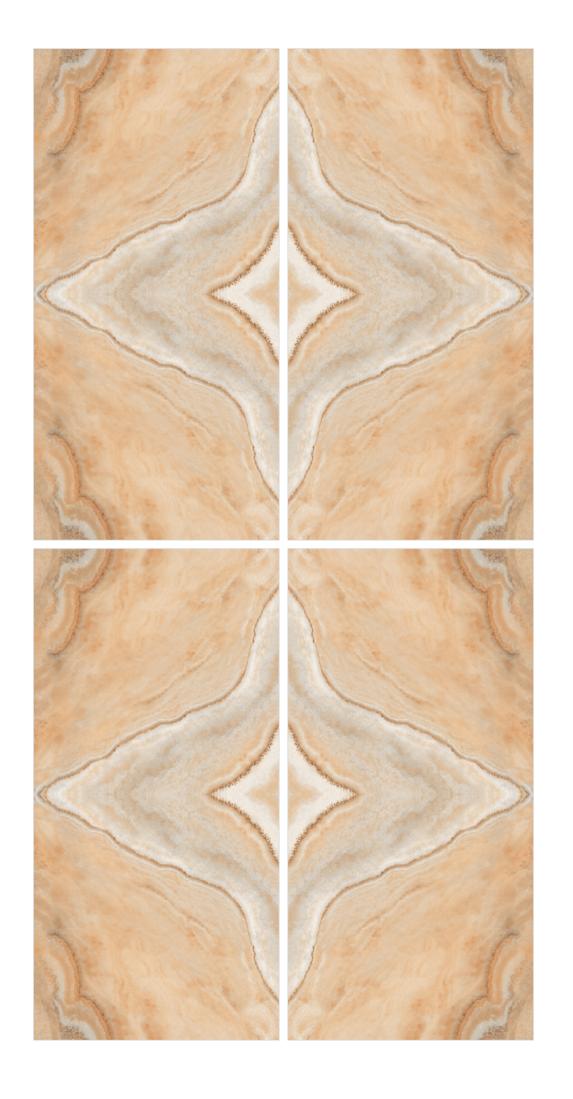





SIZE: FINISH: RANDOM GLOSSY















SIZE: FINISH: GLOSSY







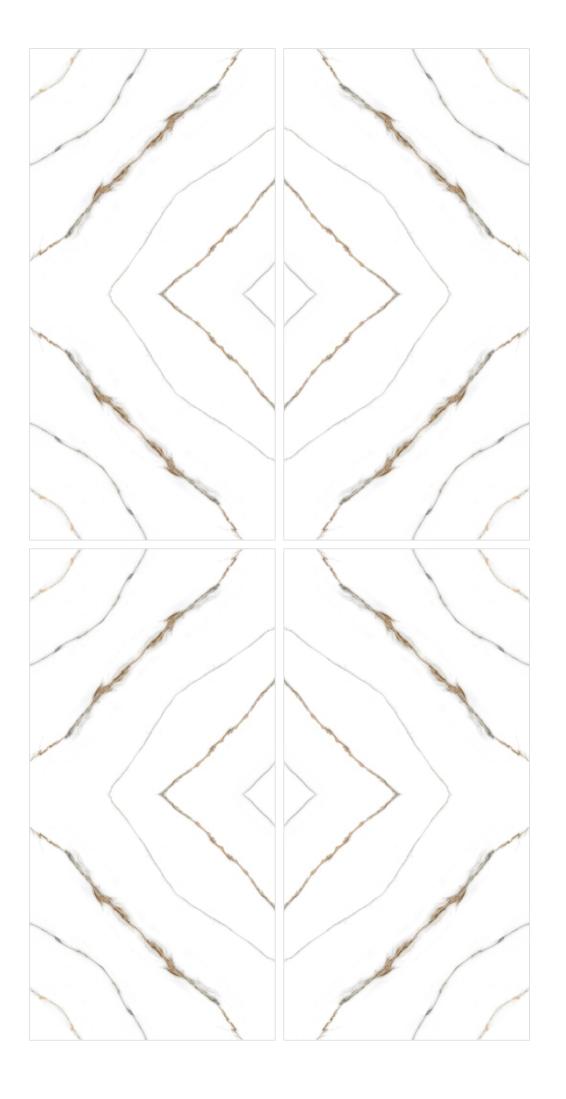

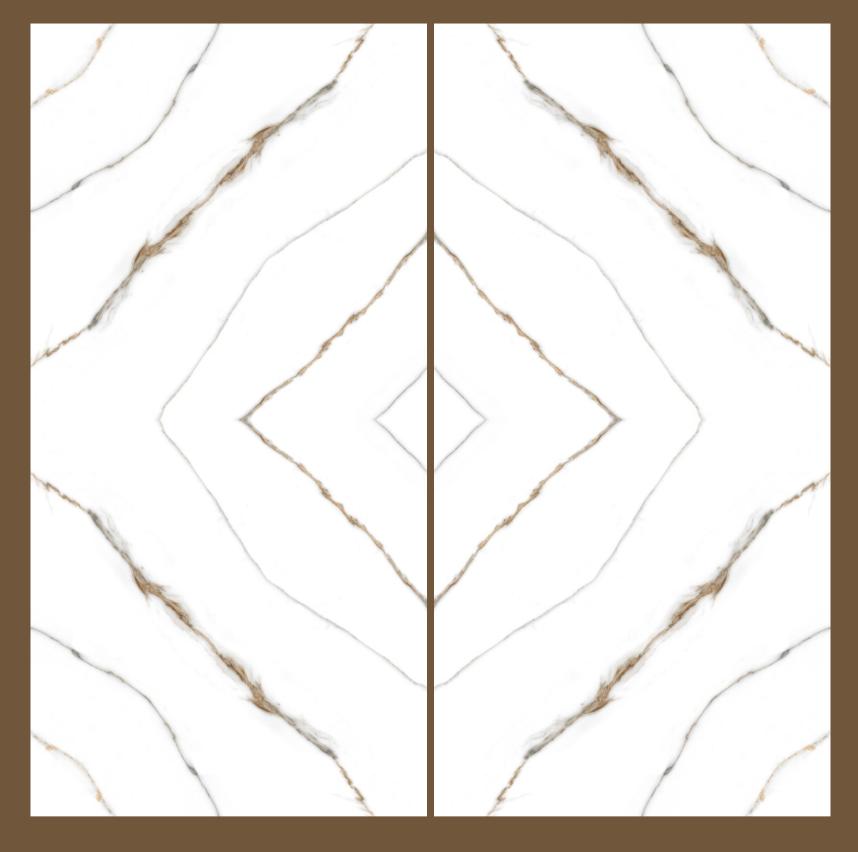












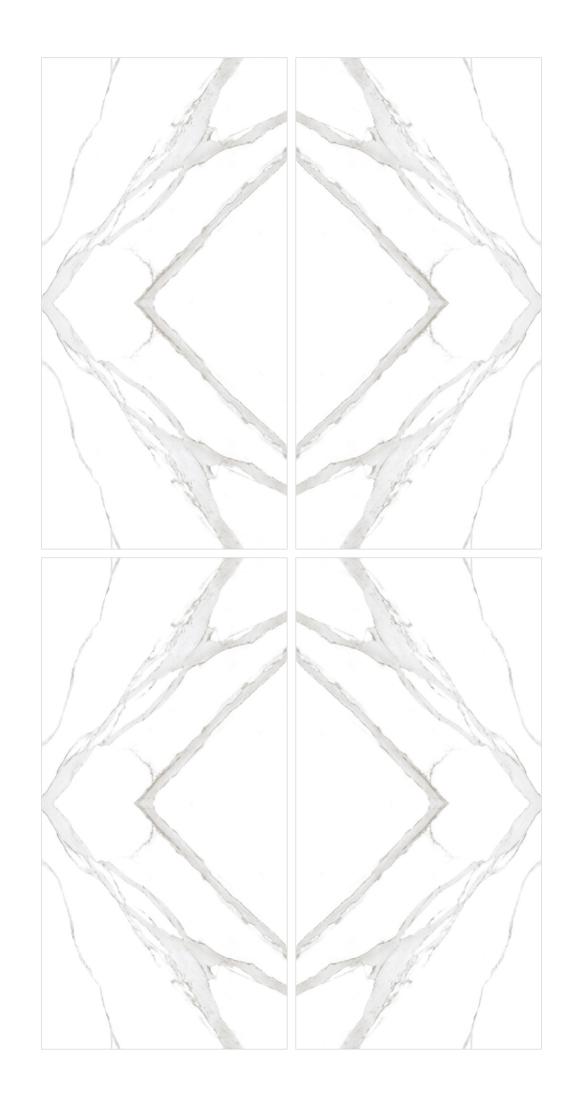





















SIZE: FINISH: RANDOM GLOSSY







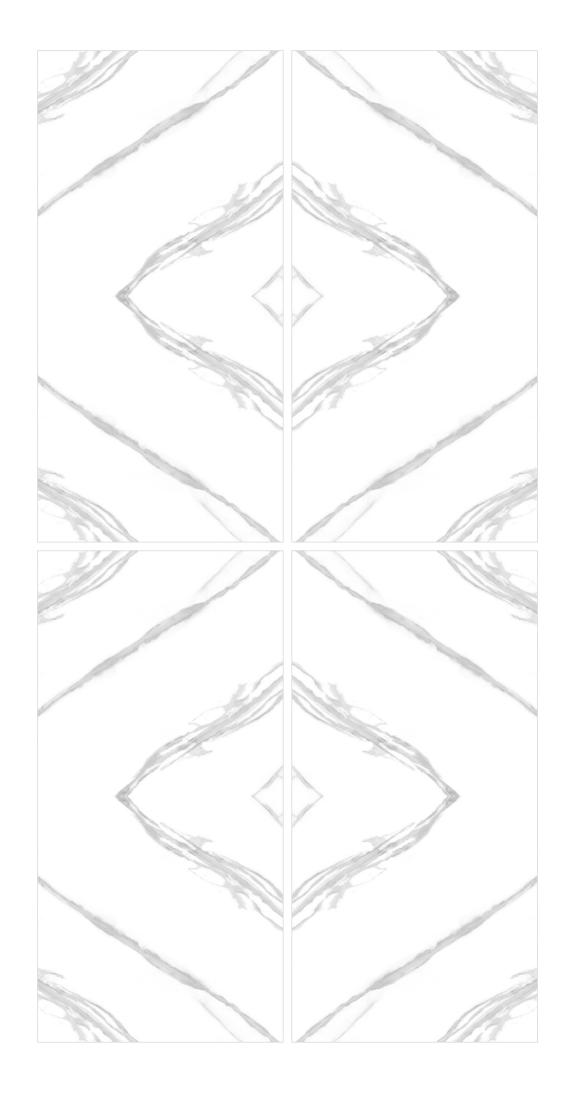

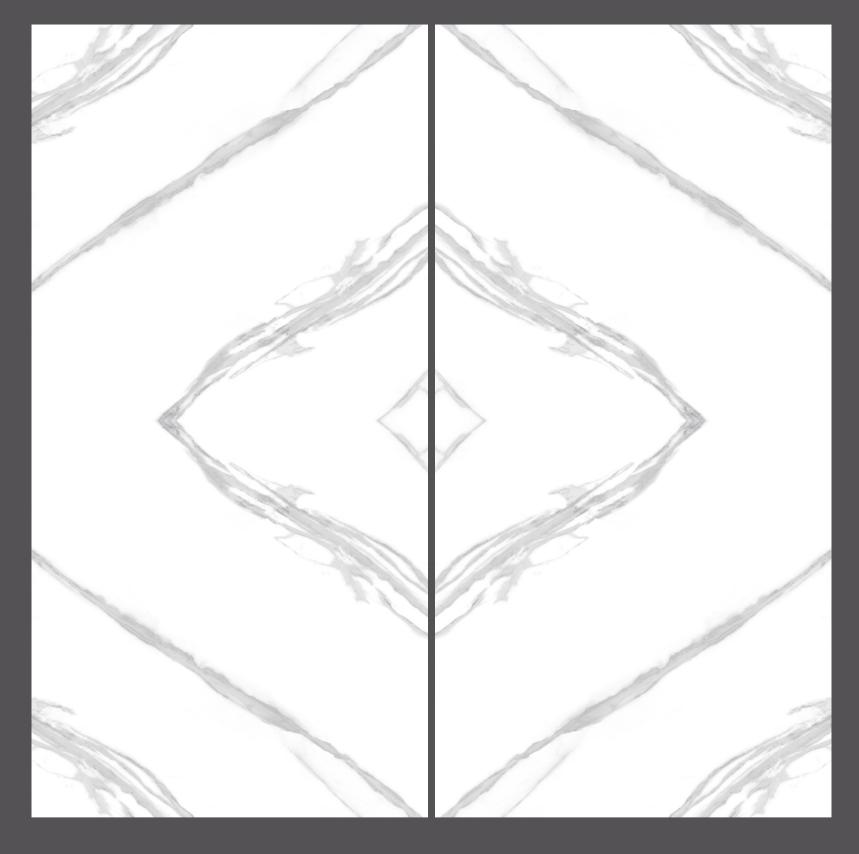











TECHNICAL SPECIFICATION

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 176 GROUP Bla	VALUE				
DIMENSION & SURFACE QUALITY							
Deviation in length	ISO-10545-2	+0.6%	±0.2%				
Deviation in Thickness	ISO-10545-2	±5% ±3%					
Straight of Sides	ISO-10545-2	±0.5%	±0.2%				
Rectangularity	ISO-10545-2	±0.5%	±0.2%				
Surface Flatness	ISO-10545-2	±0.5%	±0.2%				
F	PHYSICAL & THERMAL PRO	PERTIES					
Flexural Strength	ISO-10545-4	> 35N/mm²	> 40N/mm²				
Skid Resistance (Friction Coefficient)	ISO-10545-17	> 0.4	> 0.4				
Breaking Strenght	ISO-10545-11	>1113N	>100N				
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof				
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage				
Noisture Expansion	ISO-10545-10	NIL	NIL				
Resistance to Surface Abrasion	ISO-10545-7	Abrasion class shall be specified by the manufacturer	PIE IV				
	CHEMICAL PROPERTIE	ES					
Chemical Resistance	ISO-10545-13	No Damage No Damage					
Color Resistance	ISO-10545-16	No Damage No Damage					
Stain Resistance	ISO-10545-14	Resistant Resistant					

PACKING DETAILS

Dimension (MM)				
	PIECES	Sq. Mtr.	Sq. Feet	Weight (Apx.)
600x1200MM	2	1.44	15.50	27 Kgs.



NEWGRESS BHARAT TILES LLP

Contact us:

+91 84870 75730 | +91 84880 75730 | +91 91042 75730

Address:

Matel Rd, Lakaddhar, morbi-2 Gujarat 363621.